


Art. 940

INSERTI FILETTATI INOX A TESTA CILINDRICA

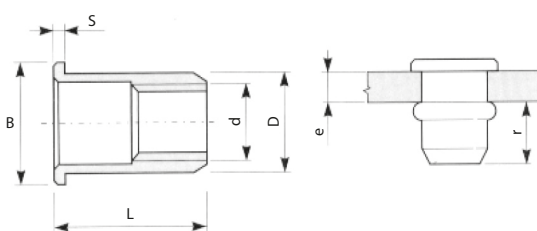


| Articolo | TIPO | e | r Min --- Max | θ | D 0 -0,1 | B 0 -0,4 | S | L |
|----------|-----------|-----------|------------------------|----------|----------------|----------------|-----|------|
| 940A* | M3 FTT/C | 0.3-:-1 | | | | | | 8.5 |
| 940B* | M3 FTT/M | 1.0-:-2 | 5.5 -:- 5.8 | 5 | 4.9 | 6 | 0.8 | 9.5 |
| 940C* | M3 FTT/L | 2.0-:-3 | | | | | | 10.5 |
| 940D | M4 FTT/C | 0.3-:-2.5 | 5.5 -:- 6 | 6 | 5.9 | 9 | 1 | 11 |
| 940F | M4 FTT/L | 2.5-:-4.0 | | | | | | 13 |
| 940G | M5 FTT/C | 0.5-:-3.0 | 7.2 -:- 7.7 | 7 | 6.9 | 10 | 1.2 | 13 |
| 940K | M5 FTT/L | 3.0-:-5.0 | | | | | | 15.5 |
| 940L | M6 FTT/C | 0.5-:-3.0 | 7.6 -:- 8.2 | 9 | 8.9 | 12 | 1.5 | 14.5 |
| 940N | M6 FTT/L | 3.0-:-5.5 | | | | | | 17.5 |
| 940P | M8 FTT/C | 0.8-:-3.5 | 9.5-:-10.1 | 11 | 10.9 | 15 | 1.5 | 17.5 |
| 940R | M8 FTT/L | 3.5-:-6.0 | | | | | | 20 |
| 940S | M10 FTT/C | 1.5-:-3.5 | 13-:-14 | 13 | 12.9 | 17 | 1.7 | 21 |
| 940U | M10 FTT/L | 3.5-:-6.0 | | | | | | 24 |

* fusto esterno liscio

Art. 940

INSERTI FILETTATI INOX A TESTA CILINDRICA

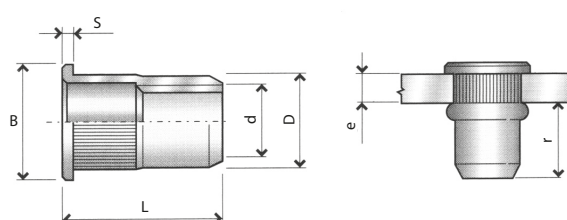

| Articolo | TIPO | d | e | r Min --- Max | θ | D | B | S | L |
|----------|----------|----|-----------|------------------------|----------|------|----|-----|------|
| 940GA4 | M5 FTT/C | M5 | 0.5-:-3.0 | 7.2-:-7.7 | 7 | 6.9 | 10 | 1.2 | 13 |
| 940LA4 | M6 FTT/C | M6 | 0.5-:-3.0 | 7.6-:-8.2 | 9 | 8.9 | 12 | 1.5 | 14.5 |
| 940PA4 | M8 FTT/C | M8 | 0.8-:-3.5 | 9.5-:-10.1 | 11 | 10.9 | 15 | 1.5 | 17.5 |

INSERTI INOX